

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
10 September 2004 (10.09.2004)

PCT

(10) International Publication Number  
**WO 2004/075771 A1**

(51) International Patent Classification<sup>7</sup>: A61C 13/00, 1/08

(21) International Application Number:  
PCT/BE2004/000024

(22) International Filing Date: 23 February 2004 (23.02.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
2003/0132 28 February 2003 (28.02.2003) BE  
60/450,672 3 March 2003 (03.03.2003) US  
60/495,731 18 August 2003 (18.08.2003) US

(71) Applicant (for all designated States except US): MATE-  
RIALISE, NAAMLOZE VENNOOTSCHAP [BE/BE];  
Technologielaan 15, B-3001 Heverlee (BE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): SWAELENS, Bart,

Filip, Jos. [BE/BE]; Vogelstraat 33, B-2580 Putte (BE).  
VRIELINCK, Luc [BE/BE]; Houtblookstraat 21, B-3600  
Genk (BE). VAN LIERDE, Carlos [BE/BE]; Nervierstraat  
8, B-3000 Leuven (BE).


(74) Agent: DONNÉ, E.; Bureau M.F.J. Bockstael nv., Aren-  
bergstraat 13, B-2000 Antwerpen (BE).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.

(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: METHOD FOR PLACING AND MANUFACTURING A DENTAL SUPERSTRUCTURE, METHOD FOR PLACING  
IMPLANTS AND ACCESSORIES USED THEREBY

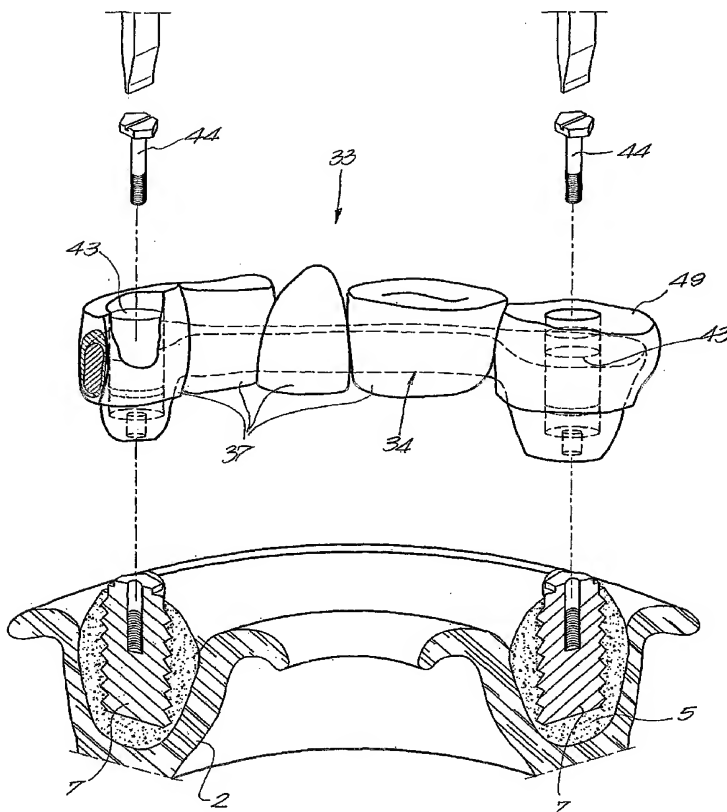

(57) Abstract: Method for placing and  
manufacturing a dental superstructure, whereby  
a computer planning is made of the position of  
the implants (7), and whereby one or several  
accessories are made on the basis of said  
computer planning by means of which the  
implants (7) can be provided, and whereby on  
these implants (7), after they have been provided,  
is fitted the superstructure (33), characterized in  
that also the superstructure (33) is made, either  
directly or indirectly, on the basis of a computer  
planning.

WO 2004/075771 A1



GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Declarations under Rule 4.17:**

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD,

SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

- of inventorship (Rule 4.17(iv)) for US only

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Method for placing and manufacturing a dental  
superstructure, method for placing implants and accessories  
5 used thereby.

This application claims the benefit under 35 USC 119(e) of  
U.S. provisional application No. 60/450,672 filed on March  
03, 2003 and of U.S. provisional application No. 60/495,731  
10 filed on August 18, 2003, and further also claims priority  
of the Belgian patent application No. 2003/0132 filed on  
February 28, 2004.

The present invention concerns a method for placing and  
15 manufacturing a dental superstructure. This is a structure  
which is fitted on implants, fixed in the bone of a  
patient, upon which artificial teeth have been or are  
provided.

20 It is known that when a number of teeth have to be built on  
more than one dental implant, a metal frame can be used to  
this end which fits on the implants, upon which the teeth  
can then be modeled in order to form the superstructure.

25 According to a conventional method for placing such a  
superstructure, implants are provided in the jaw, after  
which they are left to grow in for three to six months.  
After this osseo-integration, a mold or cast is taken of  
these implants or top pieces, called abutments, that have  
30 been fitted upon the latter. With this mold, the dental

- 2 -

laboratory will then manufacture the superstructure with the accompanying teeth.

According to a known technique, use can hereby be made of  
5 an overdenture, whereby a metal structure is fit on the implants and the prosthesis is snapped in on this structure in order to form the final superstructure.

Use can also be made of a fixed superstructure with a metal  
10 frame, for example gold or cobalt chromium, which roughly already has the shape of the teeth, and upon which porcelain teeth are made.

Traditionally, the implants are left to grow in for three  
15 to six months, after which the gums are opened again and the superstructure, made on the basis of molds of the positioned implants, are fixed on the implants.

Recently, however, there is a tendency to refrain from  
20 letting the implants grow in for three to six months, and to immediately put a load on them, what is called 'immediate loading'.

The superstructure is hereby made, according to the methods  
25 known until now, by means of (i) a test arrangement in an articulator, which is used to determine the positions of the teeth and (ii) a mold of the implants in the mouth of the patient on the other hand.

30 This mold has to be made with great precision and the three-dimensional positions of the implants must be

- 3 -

reproduced very precisely in the superstructure, since the different implants or the abutments provided upon them have to correspond exactly to the different points of contact in the superstructure.

5

Thus, the dental laboratory can only start manufacturing the superstructure after the mold has been taken. This implies that, with the present methods, it is not possible to fix the superstructure immediately after the implants  
10 have been placed, since the laboratory requires a number of days or weeks to manufacture it.

In order to solve this problem, a known technique is to use prefabricated standard superstructures in the shape of a  
15 horseshoe. According to this method, the normal operational flow is flipped upside down. Instead of adjusting the superstructure to the positioning of the implants, the implants are positioned in function of the superstructure. To this end, a drill jig is supplied with the  
20 superstructure. Both have a shape similar to that of a horseshoe. The bone is milled off thus providing a flat surface on which the drill jig is positioned. Next implant cavities are drilled on the places indicated by the jig.

25 Such a method however implies a number of major disadvantages. The bone has to be milled off in order to allow positioning of the jig on the bone. This way of working is drastic and implies loss of bone, while in many cases the patients already lack bone.

30

- 4 -

Moreover, the shape of the jaw has to correspond to the shape of a horseshoe. Even if a number of models are made in said shape of a horseshoe, there will always be patients whose jaws do not have a shape corresponding with any of  
5 the predefined standards.

Further, the position of the implant is determined by the fitting jig. Consequently, the implant cavities will not always be drilled in the best place and more often than not  
10 end up in suboptimal places, for example where the bone is not very strong. Moreover, it is only possible to place the implants in a parallel way, which is not always the best position.

15 The present invention aims a method for placing and manufacturing a dental superstructure which does not have the above-mentioned disadvantages and which is simple and fast.

20 Therefore, the invention concerns a method for placing and manufacturing a dental superstructure, whereby (i) a computer planning is made of the position of the implants, (ii) one or several accessories are made on the basis of said computer planning by means of which the implants can  
25 be placed, and whereby (iii) on these implants, after they have been placed, the superstructure is fitted, characterized in that said superstructure too is made, either directly or indirectly, on the basis of a computer planning, which normally will be the same computer planning  
30 as the above said.

- 5 -

By also realizing the superstructure on the basis of the computer planning, several advantages and new possibilities are created. Thus, for example, the superstructure can always be perfectly adjusted to the position of the implants. Moreover, it is no longer necessary to make direct molds from the patient after the implants have been placed. Further, it is also possible to realize the superstructure beforehand so, if required, it can be fitted on the implants immediately after they have been placed.

10

Manufacturing the superstructure directly or indirectly on the basis of a computer planning means that said computer planning is used to either form molding pieces for manufacturing the superstructure, to form the superstructure itself, or to form parts of such molding pieces or of such a superstructure.

It should be noted that the present invention also concerns a number of new techniques for placing one or more implants, irrespective of whether or not these techniques are used in combination with the production of a superstructure on the basis of a computer planning. Thus, for example, the invention also concerns a method for placing one or several implants, whereby a computer planning is made with reference to the position of the implants concerned, characterized in that, on the basis of this computer planning, one or several accessories are made by means of which the implants can be placed (i.e. drilling of the implant cavities and implant guidance). The method is hereby further characterized in that, for the aforesaid

30

- 6 -

accessories, one or several accessories are made and/or used, selected from the following list:

- 5     - an accessory in the shape of a drill jig in which one or several ducts are formed for drills, which are provided in the drill jig in function of the computer planning;
- 10    - an accessory in the shape of a drill jig in which one or several ducts are formed for drills, which are provided in the drill jig in function of the computer planning, whereby means are also used in combination with at least one of these ducts, which make it possible to successively work with different drill diameters in one and the same duct;
- 15    - an accessory as in the preceding paragraph, whereby the ducts have openings in which above-mentioned means can be placed, which make it possible to successively work with different drill diameters and whereby these means consist of interchangeable bushes with openings or passages of different diameters;
- 20    - an accessory as in the preceding paragraph, whereby the ducts are laterally open to allow lateral insertion of a drill and whereby the interchangeable bushes preferably are placed over the drill prior to insertion and placed in the duct while drilling to provide guidance.
- 25    - an accessory in the shape of a drill jig which is configured such that it also serves as a fitting jig;
- an accessory in the shape of a drill jig which is configured such that it also serves as a positioning jig, in particular can be used to force the implants into the required position after they have been placed;



- 7 -

- an accessory which is made as a positioning jig which allows to force the implants into the required position after they have been placed;
- an accessory according to any of the two preceding paragraphs, whereby said accessory is provided with passages for screws that can be screwed in the implants, whereby these passages and the accompanying screws have such a shape that, when the screws are tightened, they can be forced into a specific position;
- an accessory which is made as an intermediate positioning jig which has at least features which allow for a connection with at least one implant that has already been placed on the one hand, and which also has features forming a duct for a drill and/or an implant or an implant placed on an implant holder.

Other details and advantages of the invention will emerge from the description that follows of a number of embodiments and apparatus according to the invention, as well as from the attached claims.

Naturally, the invention also concerns all the parts described hereafter, used for realizing the method, such as accessories, for example all sorts of jigs, molding pieces, etc.

Naturally, the invention also concerns the method for manufacturing such accessories, characterized in that the above-mentioned accessories are built by means of a computer planning.

- 8 -

With the intention of better showing the characteristics of the invention, hereafter as example without any limiting character, some preferred embodiments of a method for placing and manufacturing a dental superstructure according to the invention are described, with reference to the accompanying drawings, in which:

Figure 1 represents a cross-section of a scan prosthesis;

10 figure 2 represents the use of a drill jig as a fitting jig while the method according to the invention is being applied;

figure 3 represents the use of a positioning jig which can be applied according to a possibility of the invention;

15 figure 4 represents the use of an intermediate fitting jig which can be applied according to a possibility of the invention;

figure 5 represents a part of a digital cast which may be used according to the invention;

20 figure 6 represents the production and use of a digital key;

figure 7 shows how the key from figure 6 and the digital cast from figure 5 can be combined;

25 figure 8 shows the actual superstructure being fit;

figures 9 to 11 further illustrate a technique which can be applied according to the invention;

figures 12 and 13 show a special embodiment of a drill jig according to the invention, in combination with a drill, for two different positions of the drill.

30

- 9 -

- With the intention of realizing a superstructure, a diagnostic setup of the future teeth will first be made. This is normally done in an articulator, i.e. an appliance in which two teeth molds or plaster models/casts can be positioned in correct relation to one another enabling the simulation of realistic jaw movement. The diagnostic setup is made on the plaster models of the remaining teeth or gums that indicates the future positions of the teeth.
- 10 The same test arrangement is also copied in a radio-opaque material in order to make a scan prosthesis 1, as represented in figure 1, the purpose of which will become clear from the further description.
- 15 According to a variant of the method, instead of realizing this diagnostic setup in a mechanical articulator, the test arrangement can also be made virtually, with a computer, by means of what is called a 'virtual articulator' which can simulate the movements of the upper jaw in relation to the lower jaw.
- 20 In this case, the jaws of the patient or a cast thereof will be scanned, for example with a laser scanner. The two scanned jaws are positioned in relation to one another by registering the respective teeth surfaces on each other, or by scanning one of the jaws with an mouldable paste on top of it, such that the surface of one jaw corresponds exactly to the other jaw.
- 30 Next, teeth can be chosen from a digital library and positioned in those places where teeth are missing.

- 10 -

After this preliminary stage, preferably as a first step of the actual method, a computer planning is made in view of the placement of the implants.

5

This can be done for example by first scanning the patient with a computed tomography scanner, CT-scanner in short, and by simulating the implants on the CT-scans, as described in the Belgian patent No. 1.011.205.

10

It is useful that the patient is scanned with what is called a scan prosthesis 1 as represented in figure 1. This is a copy of the loose prosthesis of the patient or of the diagnostic setup made by means of an articulator. This scan prosthesis 1, which is placed on the gums or mucosa 2 during the scanning, is made of a radio-opaque material which is thus visible in the CT-images, whereby the teeth 3 of this scan prosthesis 1 have another degree of opacity than the base part 4 supported on the gums or the mucosa 2, which covers the bone of the patient.

20

A typical embodiment is one in which the teeth 3 are made of acrylic resin mixed with 30% of barium sulfate, while the rest of the prosthesis 1 is made of a mixture of acrylic resin and 10% of barium sulfate. This offers the advantage that the teeth 3 are nicely visible in the CT-scan images and can thus be segmented separately in a simple manner. In addition the shape of the gums 2 will also be visible, as the base part 4 of the scan prosthesis 1 can be identified and delineates the gums and its lower side represents the shape of the gums. Furthermore, the

25  
30

- 11 -

shape of the surface of the bone 5 is perfectly visible by means of the CT-scan.

Next, a drill jig 6 is made in function of the aforesaid planning. This drill jig can possibly also serve as a fitting jig, since the implants 7 can be placed by means of it. Implant placement can possibly also be done with a separate fitting jig.

10 The drill jig 6, and possibly the fitting jig, can for example be made by means of Rapid Prototyping techniques, as described in the Belgian patent No. 1.011.205.

According to figure 2, the drill jig 6 fits on part 8 of the bone 5 of the patient (after the gums 2 have been opened) and enables pre-operative transferral of the drill directions in conformity with the planning of the surgeon. To this end, the drill jig 6 has ducts 9 for one or several drills 10.

20

It should be noted that the bone 5 may have a very irregular surface. As the drill jig 6 is designed based on data coming from the CT-scan, the part of the jig in contact with the bone will have an inner surface 8 which always follows the shape of the irregular surface very precisely. The result is that there will always be an accurate positioning.

It should also be noted that, according to a variant, said drill jig, fitting jig and possibly even said positioning jig, can be provided with a contact part which is not or

30

- 12 -

not solely designed to be supported on the bone 5, but (also) cooperates with parts of the gums 2 and/or remaining teeth of the patient

5 The drill jig 6 is used when drilling holes 11 for implants 7.

The drill jig 6 has been designed such that it can be used for all implants 7. This drill jig 6 is put only once on  
10 the patient and is possibly screwed down temporarily.

The ducts 9 are, as shown, preferably composed of several parts. First, there are a number of guiding tubes 12, preferably in the form of collars, which make up one piece  
15 together with the contact part of the drill jig 8. These tubes or collars 12 provide openings or passages 13 in which a bush 14 is fixed, made for example of metal. The bush 14 is screwed or glued in the opening 13 and provided with screw thread 15 on the inside which makes it possible  
20 for interchangeable bushes 16 with external thread 17 to be screwed in.

By using bushes 16 having the same outer diameter but with different internal diameters 18, it becomes possible to  
25 guide drills 10 having different diameters. Figure 2 represents two drills 10 having different diameters and two corresponding bushes 16.

If, as represented, the drill jig 6 is also used as a  
30 fitting jig, all the bushes 16 are unscrewed from the drill jig 6 before the implants 7 are placed, and implant holders

- 13 -

19 - whose outer diameter corresponds to the inner diameter of the bushes 14 - are put on the implants 7. When an implant 7 is placed through the opening 13, the duct guides the implant 7.

5

Such an implant holder 17 can be realized in different ways. As shown in figure 2, it may simply consist of a cylindrical body that at its lower end, for example by means of a recess 20, connects, for example, to the hexagon  
10 shaped screw 22 of the implant 7 on fixture level 21, and has a groove 23 on its top side for placing a screwdriver.

It is also possible to manufacture different drill jigs or fitting jigs corresponding to a drilling sequence, whereby  
15 every jig is used for guiding a single drill. According to this last method, a different jig with the appropriate diameters for each of the drills 10 or for each type of implant 7 is placed on the patient one after the other.

20 Drilling of the holes 11 and placing of the implants 7 "as such" can never be performed with the required precision to allow immediate placement of a premanufactured superstructure: the implants 7 will be positioned accurately within a couple of tenths of a millimeter at the  
25 most in relation with regards to the planning.

In order to solve this problem, one can use intermediate discs or glue/cement the superstructure on the implants 7 or abutments.

30

- 14 -

Said problem is preferably solved according to the present invention by means of positioning a jig 24 that draws the implants 7 nearer and nearer to the correct place, as will be further explained hereafter by means of figure 3. A  
5 combination of the preceding manners is also possible.

The positioning jig 24 is manufactured in function of the computer planning of the implants 7, with technologies that offer the same precision or possibly are identical to the  
10 ones used for manufacturing the superstructure. It preferably consists, as shown in figure 3, of a body with apertures or passages 25 intended for screws 22 that can be screwed in the implants 7. These apertures 25 and the  
15 accompanying screws 22, which needn't necessarily be the same as in figure 2, have such a shape that, when the screws 22 are tightened, they are forced in a specific position, such that the implants too 7 are aligned in relation to the positioning jig 24. To this end funnel-shaped apertures 25 can be applied.

20

The positioning jig 24 is screwed onto the implants 7 in a sequential manner. Because of the conical shape of the apertures 25 the implants 7 are forced into the desired position for fitting the superstructure when the screws 22  
25 are successively tightened.

The lower side of the positioning jig 24 must not necessarily be adjusted to the shape of the bone 5 or possibly the gums 2 of the patient. As the drilling and  
30 the implant placement have been done in function of the patient, the positioning jig 24 is only necessary for



- 15 -

fine-tuning the positions. The small adjustments will assure a perfect correspondence between the implants 7 and the superstructure at fixture level or alternatively -if abutments are used- at abutment level.

5

As shown, local supporting parts 26 may be provided on the lower side of the positioning jig 24.

10 In principle, the positioning jig 24 may have the same overall shape as the superstructure. It does not have teeth however. Moreover, the positioning jig 24 may have guiding parts 27 where it connects to the implants 7. These parts guide the implant fixtures 21 or the abutments placed upon them when the implants are drawn into place.

15

In addition special abutments, can be placed on the implants 7. Such abutments may have a ball joint on top of which a small with internal threading (or similar) allows connection to other structures to be made. This way, large  
20 angular deviations as well as larger positioning errors can be rectified.

The function of the positioning jig 24 can also be assumed by the superstructure itself. In this case, the  
25 superstructure will draw the implants 7 into the required position. If the bone 5 is rather soft, this will be done while the superstructure is being anchored to the implants.

If the bone 5 is rather hard, for example in the lower jaw,  
30 the implants 7 will not shift immediately. This will cause stresses in the superstructure. However, these stresses

- 16 -

will gradually disappear, as the superstructure slowly makes the implants 7 shift. Indeed the bone 5 will react to the strains caused by the implant shift and will be slightly remodeled.

5

The positioning jig 24 can be manufactured by a number of techniques, for example computer-controlled CNC milling in metal (CoCr,Ti,etc.), molding techniques based of a master mold made of wax, or CAD/CAM techniques.

10

Provided some minor adjustments are made, the positioning jig can also be used as an intermediate fitting jig. This intermediate jig can be used for all the implants 7, with the exception of those that were placed first. Such an intermediate fitting jig 28 is represented in figure 4.

15

When one, two or at the most three implants 7 have been placed with the ordinary fitting jig, for example the combined drill jig/fitting jig 6, the intermediate fitting jig 28 can be anchored to those implants. The intermediate fitting jig 28 has features 29, on the one hand, enabling a connection with implants 7 that have already been placed, and features 30, on the other hand, which make it possible to form a duct for one or several drills 10 and/or one or several implant holders 19.

20

25

In the given example, the features 29 consist of openings or passages 31 which can be made in a similar manner as the openings 25 and which make it possible for the fitting jig 28 to be fixed on the implants 7 that have already been placed, by means of screws 22 or in any other way.

30

- 17 -

The features 30 comprise ducts 32 which are comparable to the ducts 9, in which a bush 14 can be provided as well, in which fit interchangeable bushes 16, such that the ducts 32  
5 can be used, in an analogous manner as with the drill jig 6 from figure 4, both to guide drills for making additional holes 11 and to guide the implants 7 during their placement.

10 It is clear that in figure 4, only a part of the fitting jig 28 is represented, and that, in reality, it will be fixed on at least two implants 7 that have already been placed. As there is only a limited number of implants 7, it is not difficult to fix the intermediate fitting jig 28  
15 upon them.

As a final step, the superstructure itself is manufactured in function of the planning.

20 As the exact coordinates and directions of the implants are known, the superstructure can be made with great accuracy. This may be done for example by means of CNC processing or by means of CNC in combination with traditional molding methods. An example of the manufacture of such a  
25 superstructure 33 will be described hereafter with reference to figures 5 to 9.

A fixed superstructure 33 consists of two parts. A first part 34 fits on the implants 7 and is preferably designed  
30 and manufactured by means of a digital mold cast 35, as will be further described in detail. The second part 36,

- 18 -

upon which the teeth 37 are modeled, is produced by means of for example the digital articulator or a scan prosthesis 1.

5 The digital cast 35, a part of which is represented in figure 5, as well as a larger part in figure 7, can for example be made by means of rapid prototyping on the basis of the digital data of the aforesaid CT-scan and the computer planning. The scan prosthesis 1 hereby provides  
10 information about the gums 2, and the computer planning provides information regarding the positioning of the implants or any abutments fixed upon the latter. Thus, it is possible to build such a digital cast 35, which is in fact a one-piece model representing both the gums 2 and the  
15 bone 5 of the patient.

Also holes 38 are left in the digital cast 35 -based of the computer planning- in which implant replicas 39 can be fixed.

20

Thus a model is obtained, having the shape of the gums 2, and in which implant replicas 39 are found. This is exactly the same as traditional, manually made cast which is normally used in the laboratory to produce a  
25 superstructure. The laboratory can thus continue working the way it is used to. It is for example possible to screw gold cylinders on the replicas, cast a frame (for example a golden one), thus forming the above-mentioned part 34. . Other CAD/CAM techniques can be used by measuring the model  
30 again.

- 19 -

In order to obtain the desired shape of the teeth 37 in the superstructure 33, a diagnostic setup 40 of the teeth 37 is made in an articulator (figure 6). The teeth 37 are hereby placed in an aesthetic manner in functional relation to,  
5 both the antagonists and the existing teeth in the same jaw half.

A mold of the teeth 37 in the setup 40 is made which will further be referred to as 'key' 41. This key 41 has a part  
10 42 which precisely delineates the gums 2.

By means of this key 41, the shape of the teeth 37 is transferred to the digital cast 35, or possibly to a similar cast made in another manner, by positioning said  
15 key 41, as represented in figure 7, on said cast. The key 41 fits on the digital cast 35, since an identical shape of the gums 2 is used as the basis.

By positioning the mold, in particular the digital cast 35,  
20 and the key 41 against one another, and possibly by fixing them against one another, an entire model is obtained which mimics the surface of the gums 2 on the one hand, and which represents a negative of at least the front side of the teeth 37 on the other hand by means of the key 41. Based on  
25 this model a dental technician will be able to build the superstructure 33.

According to an important variant, the key 41 can also be built in a digital manner on the basis of the computer  
30 planning. As the shape of the teeth 37 and the shape of the gums 2 are known in the digital model which has been made

beforehand with the computer, it is possible to realize a digital key, preferably by means of rapid prototyping, analogous to the above-mentioned key 41, which thus also fits on the digital cast 35, on the basis of said digital  
5 model.

By taking an offset of the shape of the teeth 37, it is possible to immediately realize the shape of the metal frame, or of the part 34. Taking an offset means that a key  
10 is realized in which the surface corresponding to the outer shape of the teeth 37 is shifted somewhat inwardly. Thus, it is possible to realize a metal shape following the contour of the teeth 37 but situated somewhat more inwardly. By then providing teeth plates upon it and/or by  
15 providing a texture over it and/or a porcelain coating, it is possible to provide teeth on the superstructure 33. This is also indicated with reference 37, whose outer side corresponds to the aimed shape.

20 Such an offset operation thus implies a design compensation to allow an outer layer to be applied, for example made of porcelain, on the metal part of the superstructure 33.

Possibly two digital keys could be manufactured, one  
25 corresponding to the shape of the teeth and the other to the shape of the frame to be realized.

Naturally, when manufacturing the superstructure 33 or a model thereof which can subsequently be cast in metal,  
30 anchorage points should be provided in the right places on the superstructure 33 to allow the superstructure to be

- 21 -

fixed onto the implants 7. As shown in figure 7, little golden cylinders 43 may be placed on the replicas 39 to this end, around which the metal frame of the superstructure 33 is built. These cylinders 43 form  
5 openings which make it possible to screw the thus manufactured superstructure 33 on the implants 7 or to fix it upon them in another manner, as represented in figure 8. The holes above the screws 44 are sealed with a filler after fixation.

10

In fact, all sorts of molds and negatives of molds serving as an accessory can be realized by means of computer planning according to the invention, and it is not limited to the above-described digital cast and digital key.

15

Figure 9, for example, shows another variant of a mold piece 45 made in an entirely digital manner by means of computer planning. The contour of the part A-B-C represents the shape of a tooth, which is known from the scan data  
20 obtained by scanning the scan prosthesis 1. On the basis thereof a contour D-E can be determined which has been shifted slightly (e.g. which is offset in relation to the contour B-C). Also the contour F of the bone 5 is known from the scan data, while the contour G of the holes 11 is  
25 known from the computer planning. Based on this information a mold piece 45 can thus be built whose contour part A-D-C and the contours G and F can be realized with great accuracy. The intermediate contour E-H can be formed by filling the space 46, for example via thermojet.

30

On the basis of the then obtained mold piece 45 a piece 47, with a section as given in figure 10, can be made in wax or another modeling material. This piece 47 can then be cast in metal, so that a piece 48 as in figure 11 is obtained, upon which teeth plates or a porcelain layer 49 can be provided in order to form the outer side of the teeth of the superstructure 33.

According to yet another variant, the shape of the superstructure itself or of a part thereof can be directly digitally converted to a model, for example by realizing the piece 47 by means of direct prototyping.

According to yet another possibility, the actual superstructure 33, or at least the metal part thereof, is realized immediately by using the digital data available via the scans and computer planning, to for example form the metal frame of the superstructure 33 directly out of metal, for example by means of CAD/CAM techniques. In practice, use can possibly be made to this end of a five-axis milling technique in titanium.

Figures 12 and 13 show a special embodiment of a drill jig according to the invention, wherein at least one duct 9 is laterally open, in other words is provided with at least one lateral opening 50, which opening allows the lateral insertion of a drill 10.

In case the duct 9 is provided with a collar 12 and a bush 14, the opening 50 preferably extends through the wall of this collar 12 and bush 14.



Hereby, the above said interchangeable bushes 16 can be placed over the drill 10 prior to insertion and placed in the duct 9 by sliding and turning them over the drill 10  
5 and/or automatically as a result of the drilling action. Hereby the bushes 16 provide a guidance for the drill 10.

The lateral opening 50 allows that the duct 9 is more easily accessible by a drill 10.

10

It is clear that the drill jig 6 of figures 12-13 can also be used as a fitting and/or positioning jig.

It is also clear that, according to the invention, a drill  
15 jig 6 with such lateral opening 50 can be applied in combination with the above said methods for placing implants, as well as in combination with any other method for placing implants, in which a computer planning may be used or not.

20

Furthermore, it is clear too that such lateral opening 50 can be used in combination with interchangeable bushes 16 or not. Moreover, such opening 50 can be used in combination with bushes 14 or not, or can be used in  
25 combination with any other additional accessories.

The present invention is by no means limited to the above-described embodiments given as an example and represented in the accompanying drawings; on the contrary, such a  
30 method for placing and manufacturing a dental

superstructure can be made in all sorts of variants while still remaining within the scope of the invention.

Claims.

- 5 1. Method for placing and manufacturing a dental superstructure, whereby a computer planning is made of the position of the implants (7), and whereby one or several accessories are made on the basis of said computer planning by means of which the implants (7) can be placed, and  
10 whereby on these implants (7), after they have been placed, the superstructure is fitted (33), characterized in that also the superstructure (33) is made, either directly or indirectly, on the basis of a computer planning.
- 15 2. Method according to claim 1, characterized in that the superstructure (33) is made prior to placement of the implants (7), and in that the superstructure (33) is fixed on the implants (7) before they have grown in, in particular immediately after or shortly after the placing  
20 of these implants (7), whereby the superstructure (33) functions as an element for the application of the immediate loading technique.
3. Method according to any of the preceding claims,  
25 characterized in that use is at least made of a drill jig (6) designed in function of the computer planning in which several ducts (9) are provided for drill guidance (10).
4. Method according to claim 3, characterized in that, in  
30 combination with the aforesaid duct or ducts (9), means are

used which make it possible to successively work with different drill diameters.

5     5. Method according to claim 4, characterized in that every duct (9) consists of an opening (13) and in that the above-mentioned means, which make it possible to successively work with different drill diameters, consist of interchangeable bushes (16) placed in the openings (13), whereby these bushes (16) have different internal  
10     diameters.

6. Method according to claim 5, characterized in that the ducts (9) are laterally open to allow lateral insertion of a drill (10), whereby the interchangeable bushes (16) are  
15     placed over the drill (10) prior to its insertion into the duct (9) and placed in the duct (9) while drilling to provide guidance.

7. Method according to any of claims 3 to 6, characterized  
20     in that the drill jig (6) is also used as a fitting jig.

8. Method according to any of claims 3 to 7, characterized in that the drill jig (6) is also used as a positioning  
25     jig.

9. Method according to any of the preceding claims, characterized in that use is at least made of a positioning jig (24) as an accessory which makes it possible to force the implants (7) into the required position after they have  
30     been placed.

- 27 -

10. Method according to claim 9, characterized in that a positioning jig (24) is used provided with one or several apertures (25) for screws (22) that can be screwed in the implants (7), whereby these apertures (25) and the  
5 accompanying screws (22) have such a shape that, when the screws (22) are tightened, they can be forced into a specific position.

11. Method according to any of the preceding claims,  
10 characterized in that use is at least made of an intermediate positioning jig (28) as an accessory which at least has features (29) allowing a connection to be made with at least one implant (7) that has already been placed, and features (30) forming a duct for a drill (10) and/or an  
15 implant (7) or an implant (7) placed on an implant holder (19).

12. Method according to any of the preceding claims, characterized in that accessories are formed to realize the  
20 superstructure (33) by means of data obtained by scanning the patient and by means of a computer planning.

13. Method according to claim 12, characterized in that, for the above-mentioned accessories for realizing the  
25 superstructure (33), use is at least made of one of the following or a combination of two or more of the following elements:

- an accessory in the shape of a digital cast (35) representing the general shape of the bone (5) and/or of  
30 the gums (2) and in which the positions of the implants

are represented, in particular by means of implant replicas (39), holes or the like;

- an accessory in the shape of a key (41) with a part representing the shape of the teeth (37) and a part (42) which is a negative of at least a part of the shape of the gums (2);
- an accessory in the shape of a mold piece (45) with contour parts (A-B-C) and possibly a shifted part (D-E) adjusted to the shape of the teeth (37) of the superstructure (33) to be formed, and with contours (G-F) representing the shape of the holes for the implants (7) and of the bone (5) respectively;
- an accessory in the shape of a piece (47) made directly out of a modeling material and which has the shape of the superstructure (33) or of a part thereof.

14. Method according to any of the preceding claims, characterized in that for the production of the superstructure (33) use is made of a key (41), on the one hand, representing a mold of the teeth (37), which (41) is obtained by means of a mold on the basis of a diagnostic arrangement (40) of the teeth (37), and of a digital cast (35), on the other hand, representing the general shape of the bone (5) together with the gums (2), and in which the positions of the implants are represented, in particular by means of implant replicas (39), whereby the key (41) and the digital cast (35) fit against one another.

15. Method according to any of claims 1 to 11, characterized in that the superstructure (33), or at least a part thereof, in particular the metal frame, is built

directly on the basis of the digital data obtained from the computer planning and possibly the accompanying scans.

16. Method according to claim 15, characterized in that the  
5 superstructure (33), or at least the above-mentioned part thereof, is realized by means of rapid prototyping techniques.

17. Method to provide one or several implants whereby a  
10 computer planning is made with regard to the positioning of the implants concerned, characterized in that, on the basis of this computer planning, one or several accessories are made by means of which the implants (7) can be placed.

18. Method according to claim 17, characterized in that for  
15 the aforesaid accessories, one or several accessories are made and/or used, selected from the following list:

- an accessory in the shape of a drill jig (6) in which one or several ducts (9) for drills (10) are formed,  
20 which duct or ducts (9) are provided to the drill jig (6) as a function of the computer planning;
- an accessory in the shape of a drill jig (6) in which one or several ducts (9) for drills (10) are formed, which duct or ducts (9) are provided to the drill jig  
25 (6) as a function of the computer planning, whereby means are also used in combination with at least one of these ducts (9), in particular accessories, which make it possible to successively work with different drill diameters in one and the same duct;
- 30 - an accessory as in the preceding paragraph, whereby the above-mentioned ducts (9) are provided with passages

- (13) and whereby the above-mentioned means which make it possible to successively work with different drill diameters consist of interchangeable bushes (16) provided in the passages (13) concerned, whereby bushes (16) with passages of different diameters are applied;
- an accessory in the shape of a drill jig (6) which is configured such that it also serves as a fitting jig;
  - an accessory in the shape of a drill jig (6) which is configured such that it also serves as a positioning jig, in particular can be used to force the implants (7) into the required position after they have been placed;
  - an accessory which is made as a positioning jig (24) which allows to force the implants (7) into the required position after they have been placed;
  - 15 - an accessory according to any of the two preceding paragraphs, whereby said accessory is provided with passages (25) for screws (22) that can be screwed in the implants (7), whereby these passages (25) and the accompanying screws (22) have such a shape that, when
  - 20 the screws (22) are tightened, they can be forced into a specific position;
  - an accessory which is made as an intermediate fitting jig (28) which has at least features (29) which allow for a connection with at least one implant (7) that has
  - 25 already been placed on the one hand, and which also has features (30) forming a duct for a drill (10) and/or an implant (7) or an implant (7) placed on an implant holder (19);
  - an accessory in the shape of a drill jig (6) in which
  - 30 one or several ducts (9) for drills (10) are formed,



- 31 -


whereby at least one of these ducts (9) is provided with at least one lateral opening (50).

19. Accessory for placing implants, characterized in that  
5 it is at least partially made by means of computer planning, whereby this accessory is produced according to one of the possibilities summed up in claim 18.


20.- Accessory for placing implants, more particularly a  
10 drill jig (6), in which one or several ducts (9) for drills (10) are formed, which duct or ducts (9) are provided with a lateral opening (50) for a drill (10).

21.- Accessory according to claim 20, characterized in that  
15 it comprises interchangeable bushes (16) of different inner diameter for guiding a drill (10), whereby such bushes (16) can be placed on the drill (10) prior to insertion of the drill (10) in the duct (9).

1/6

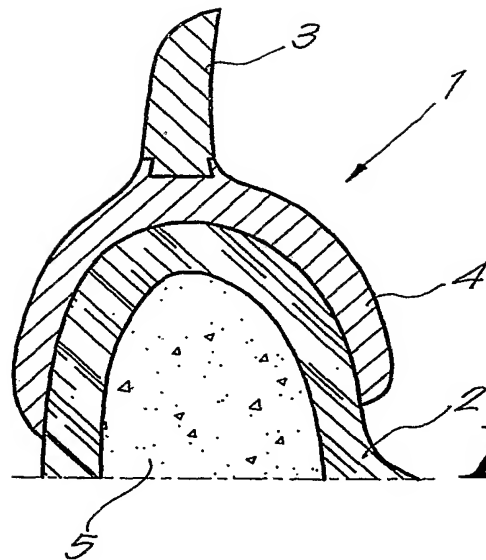


*Fig. 1*

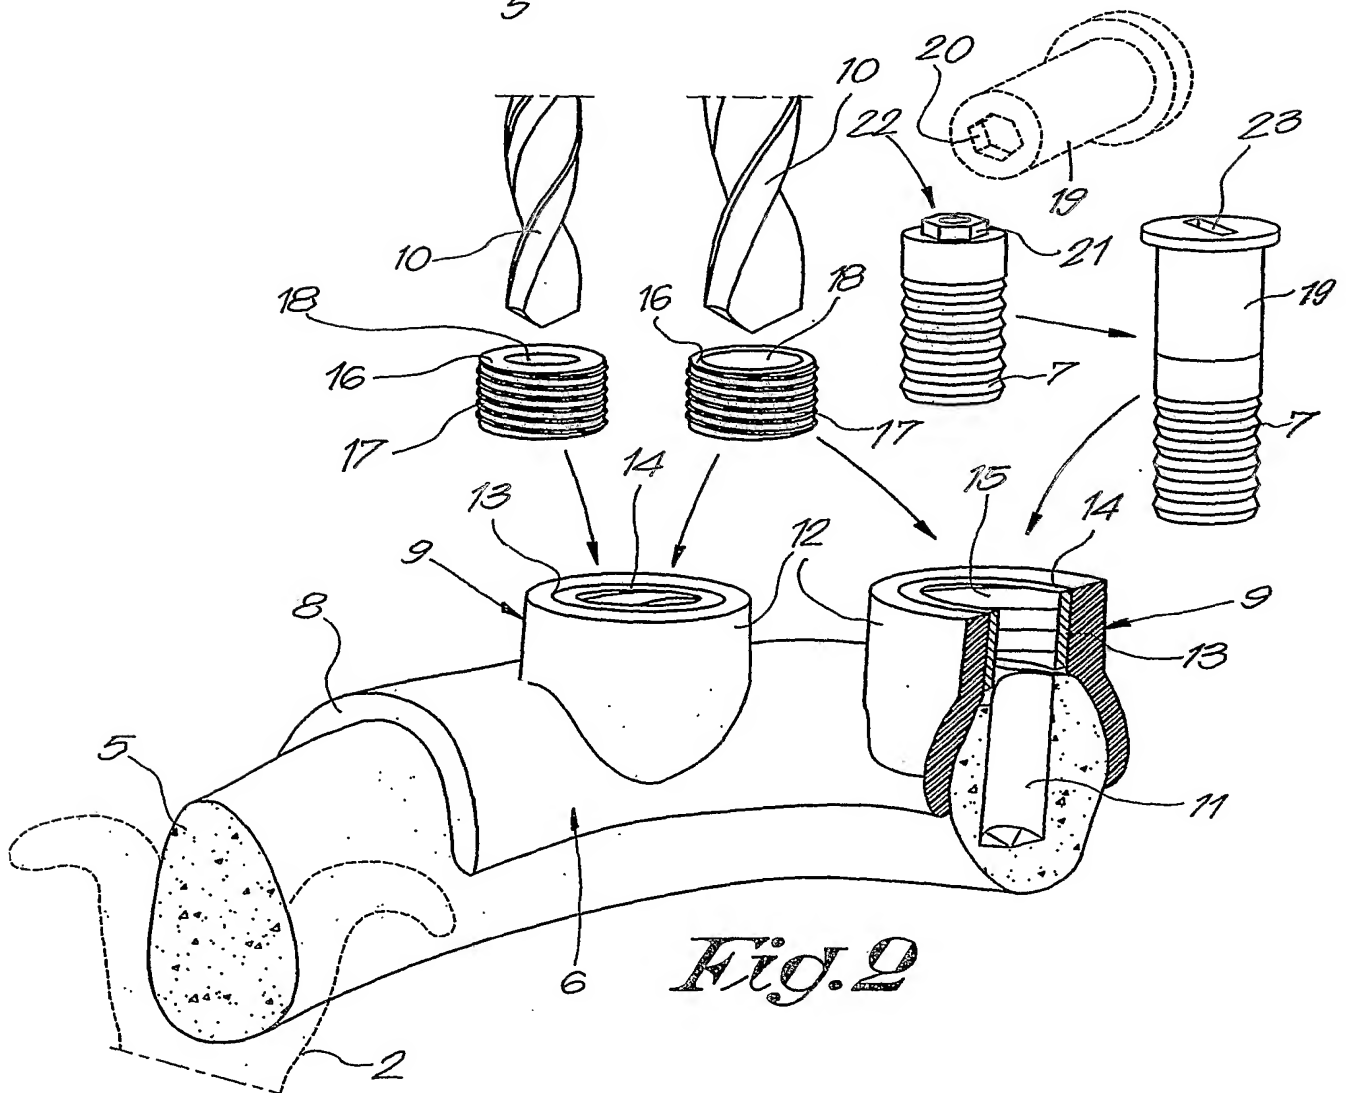


*Fig. 2*



2/6

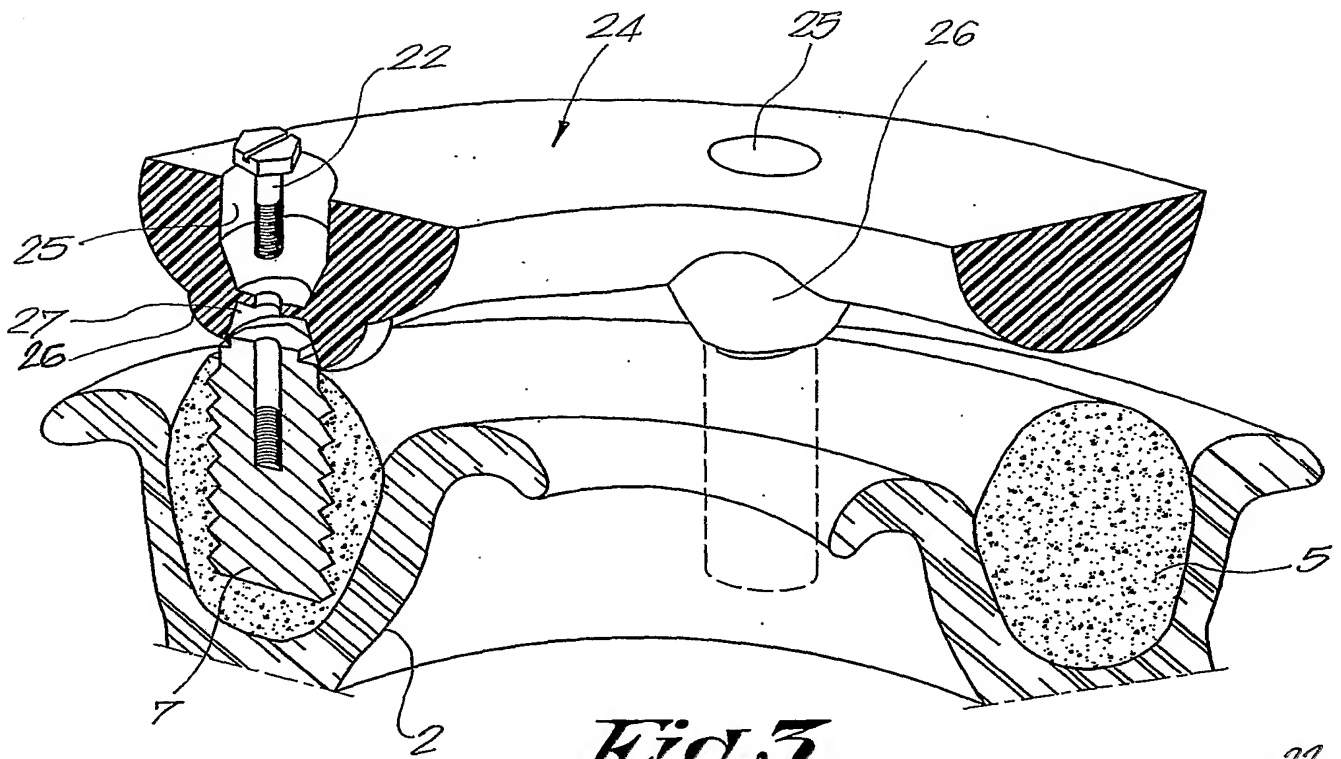

*Fig. 3*

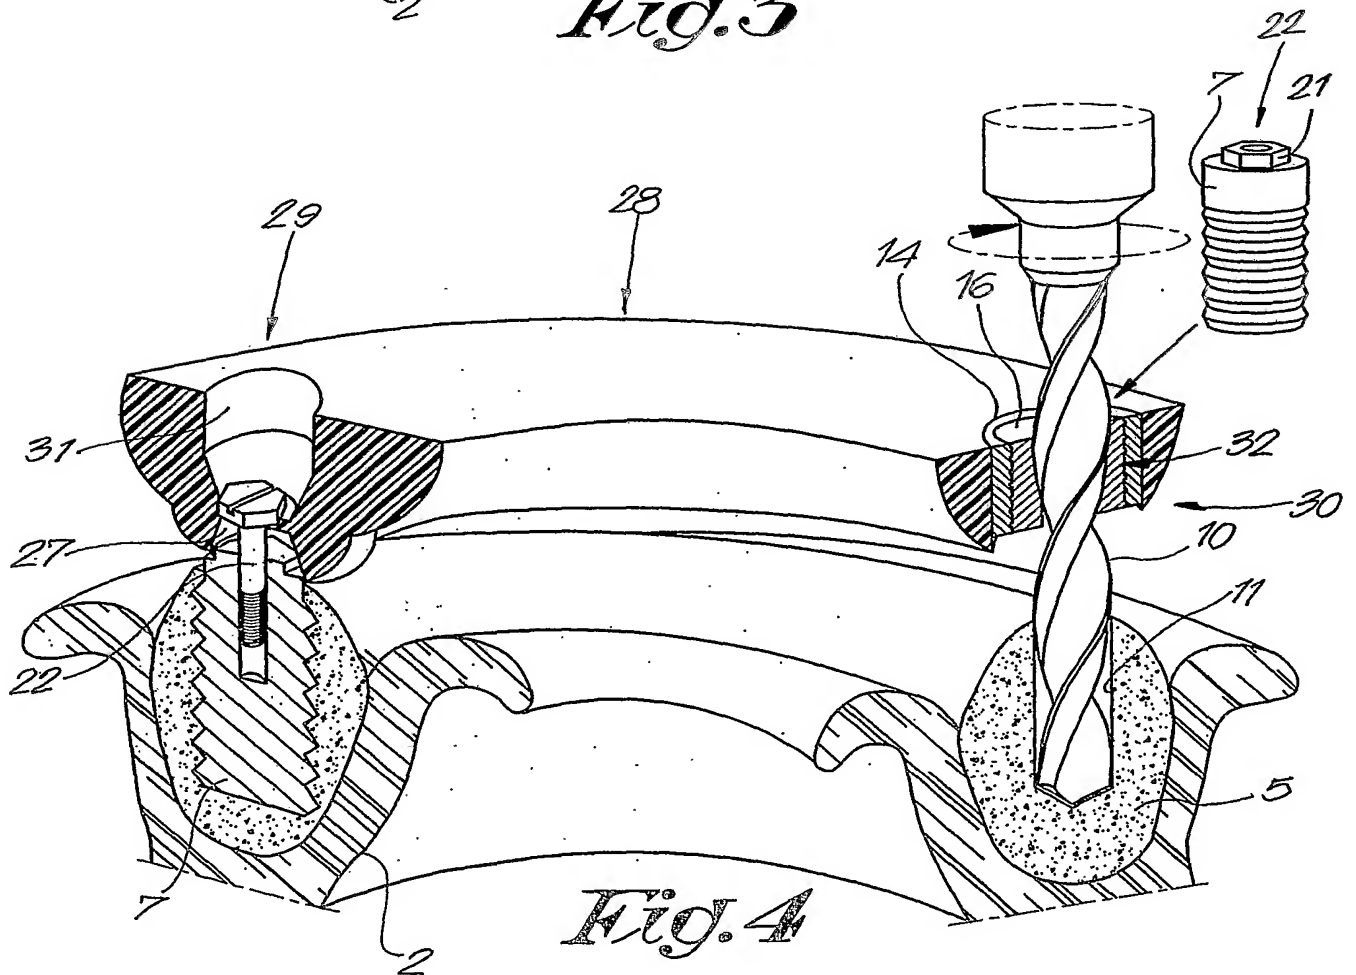

*Fig. 4*

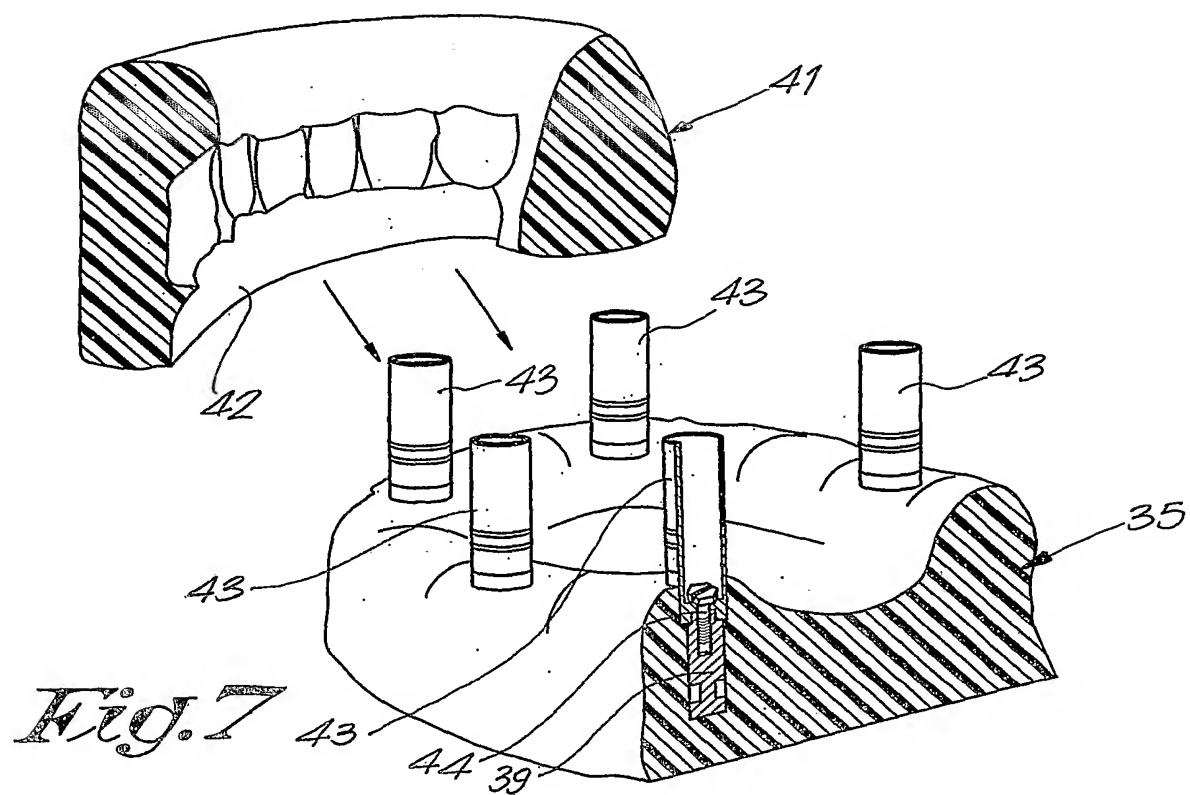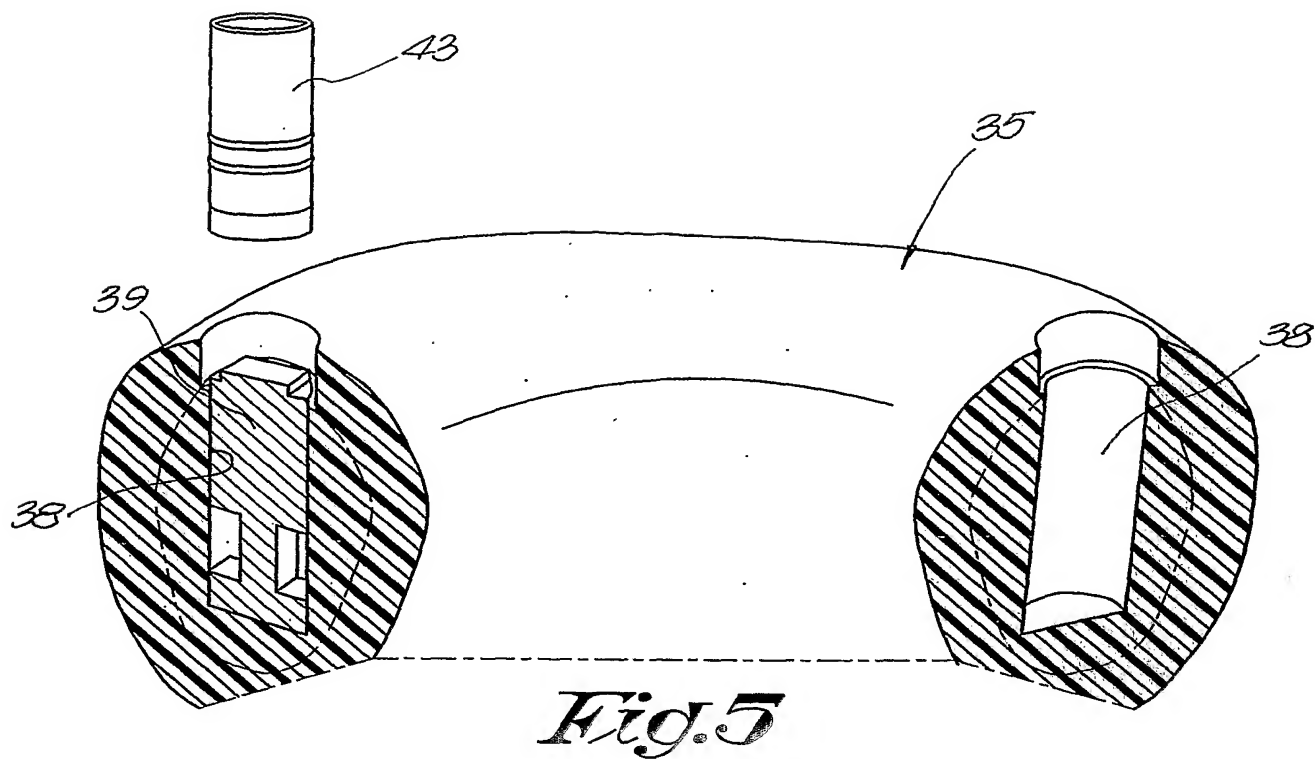







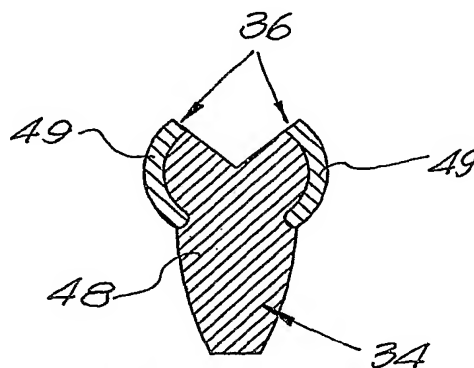


Fig. 10

Fig. 11

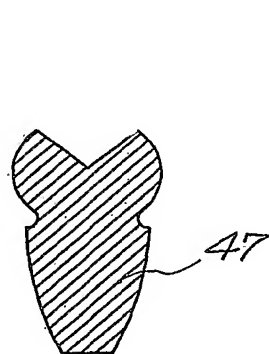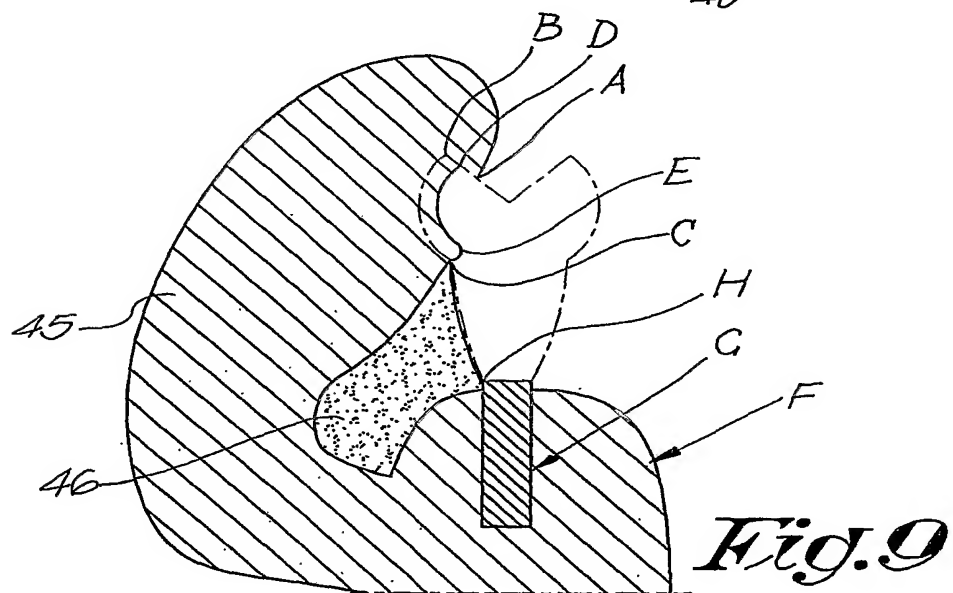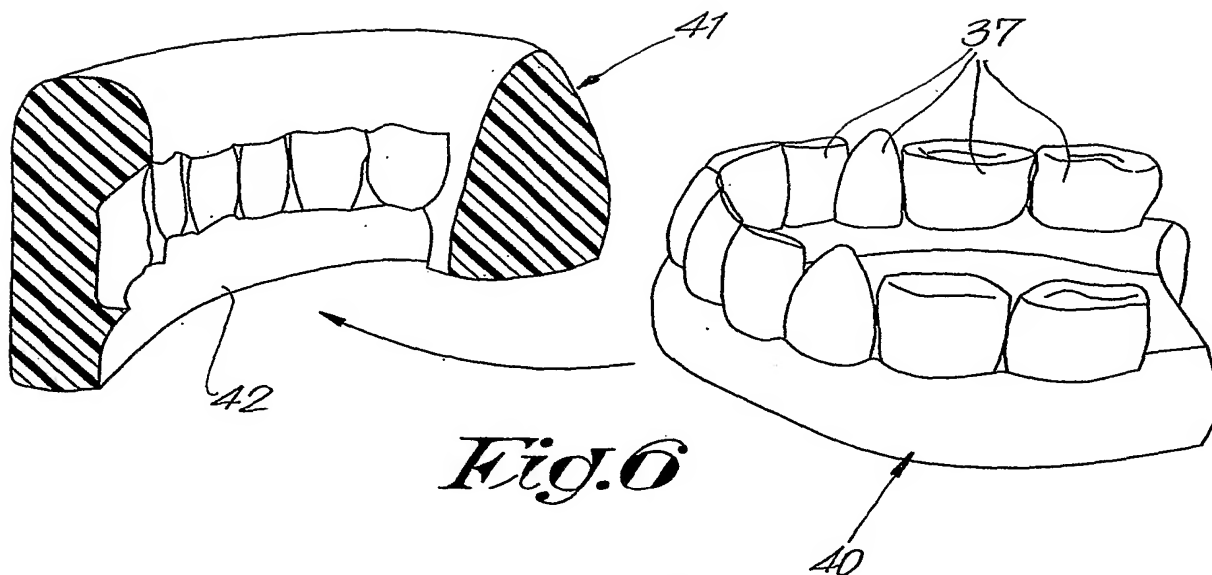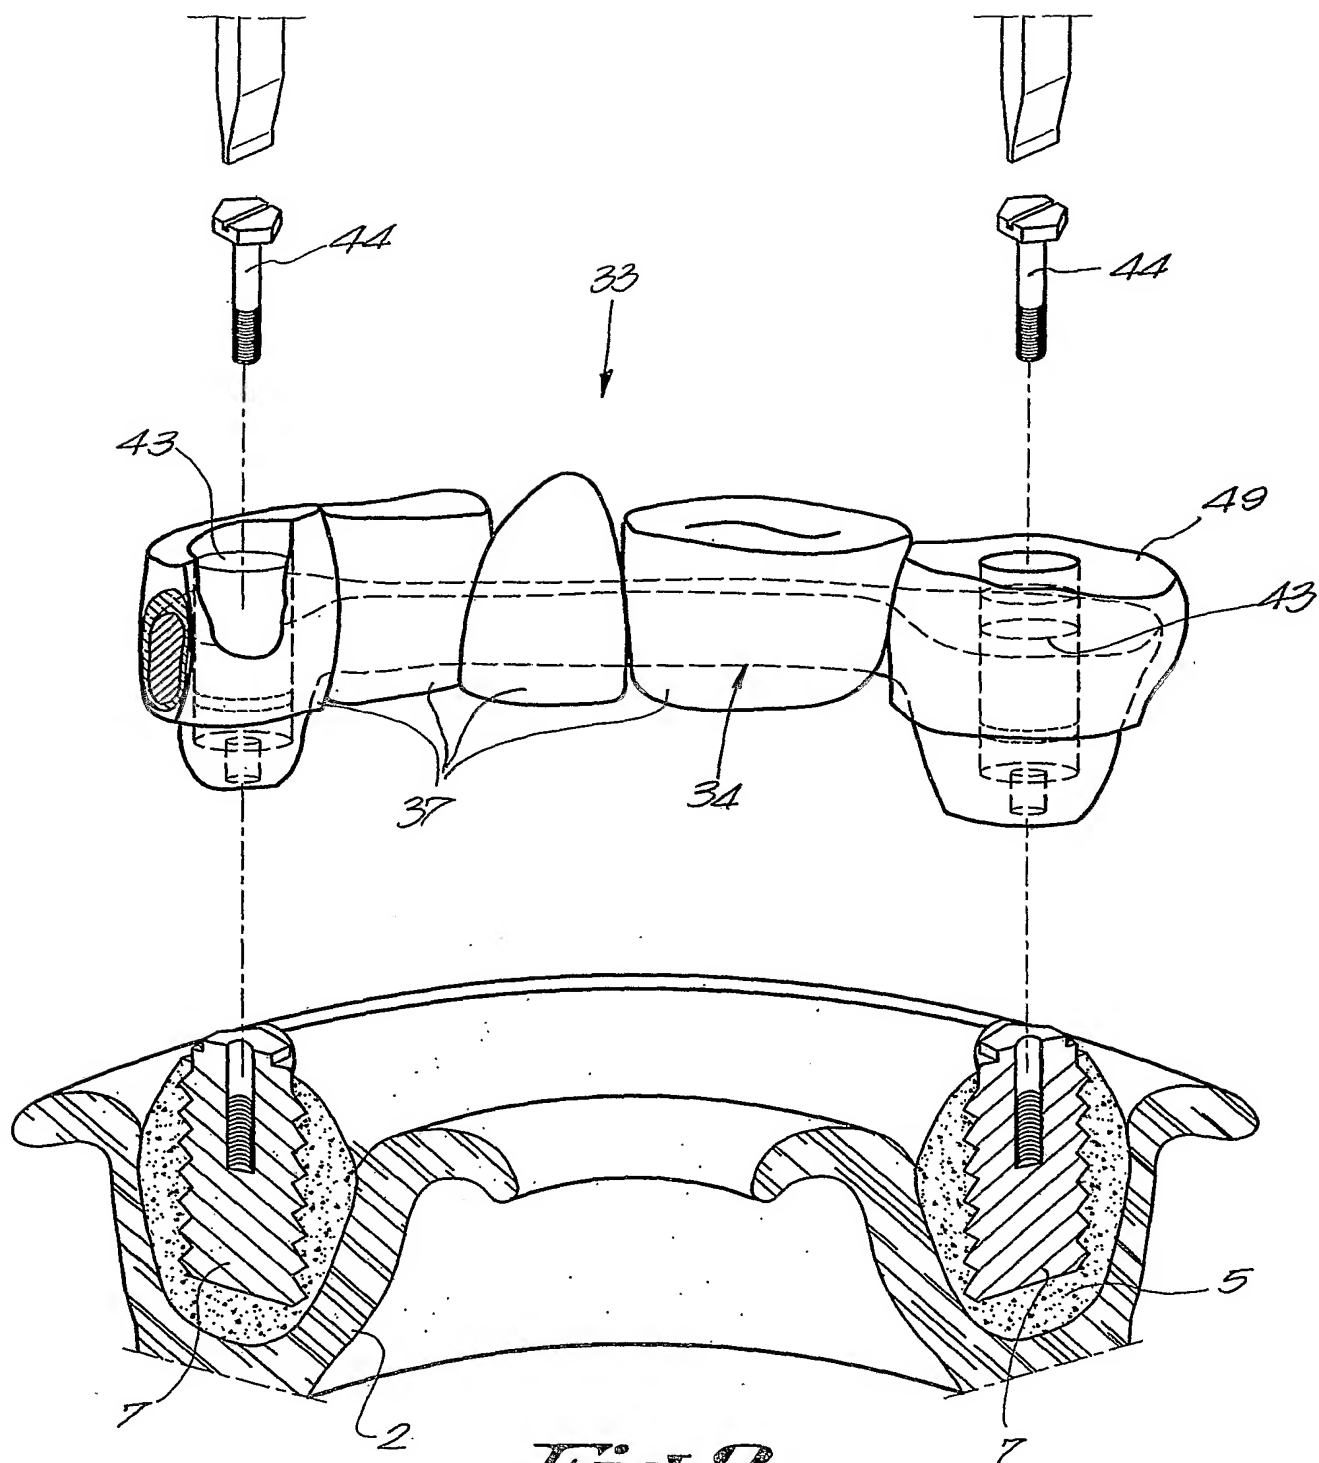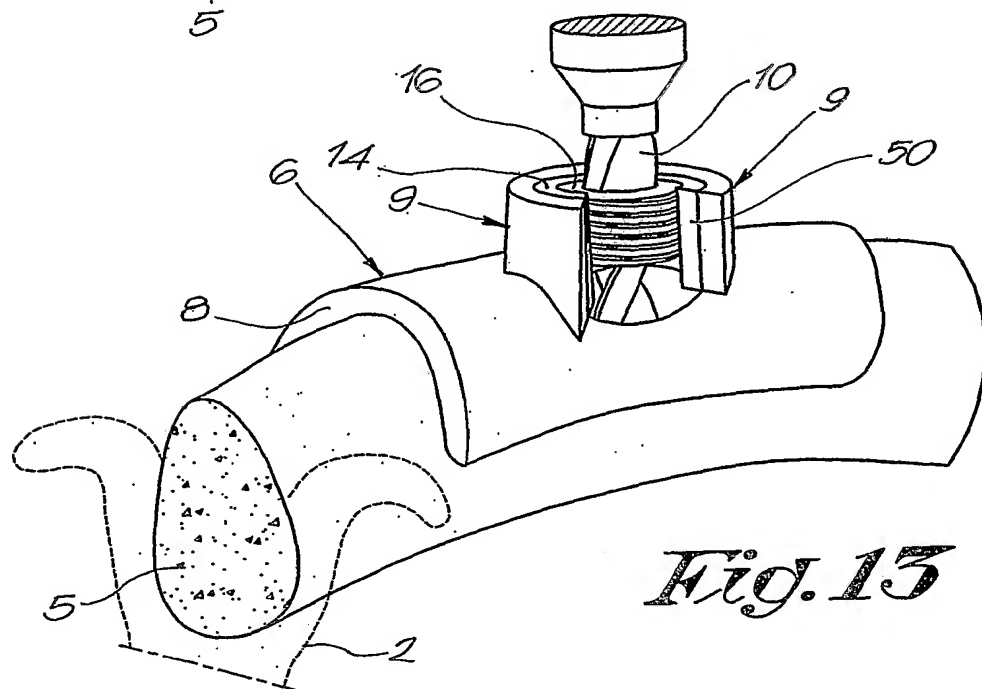

*Fig. 8*

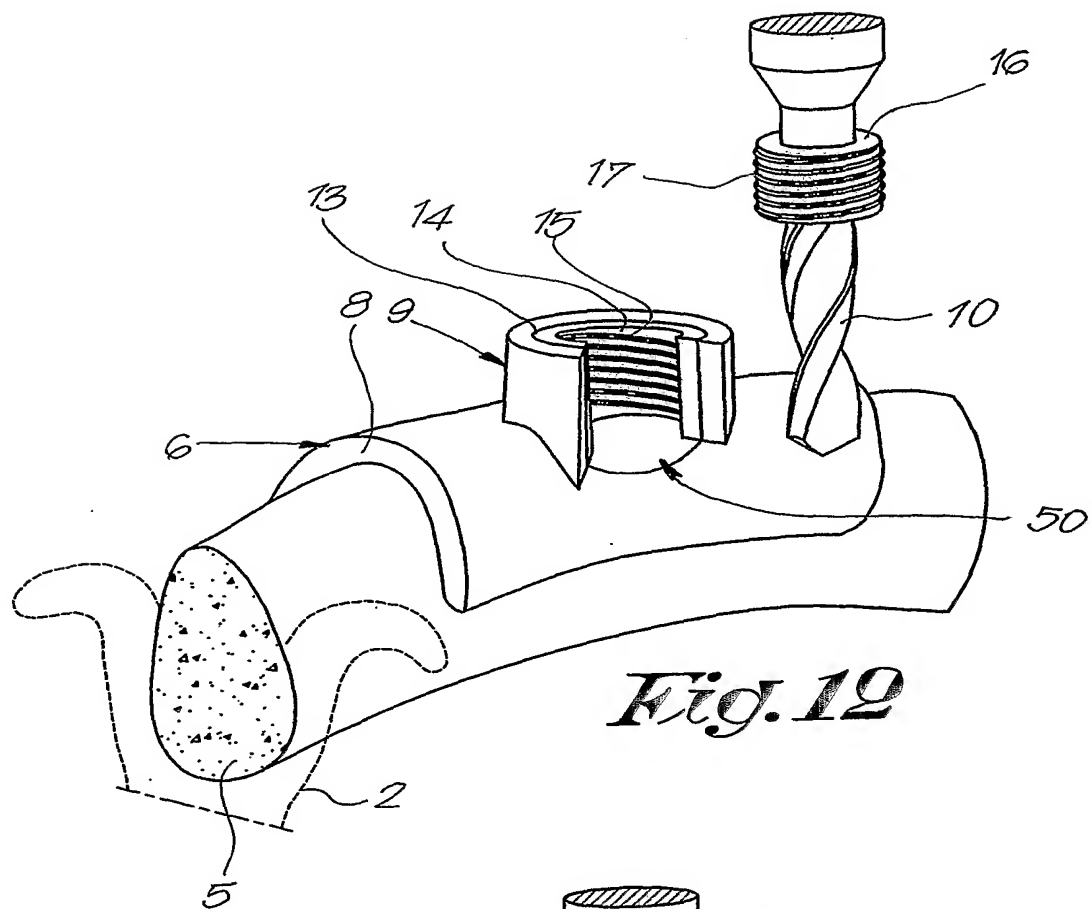

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/BE2004/000024

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 A61C13/00 A61C1/08

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2002/102517 A1 (POIRIER MICHEL) 1 August 2002 (2002-08-01) claims 9-F -----	1-6, 11, 14, 16-18

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

## ° Special categories of cited documents :

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*Z\* document member of the same patent family

Date of the actual completion of the international search

13 July 2004

Date of mailing of the international search report

23/07/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Vanrunxt, J



# INTERNATIONAL SEARCH REPORT

Information on patent family members

ational Application No

PCT/BE2004/000024

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2002102517 A1	01-08-2002	WO 9932045 A1	01-07-1999
		US 6382975 B1	07-05-2002
		US 5725376 A	10-03-1998
		WO 03073954 A1	12-09-2003
		AU 5472498 A	12-07-1999
		CA 2314866 A1	01-07-1999
		DE 69724669 D1	09-10-2003
		DE 69724669 T2	08-07-2004
		EP 1364625 A1	26-11-2003
		EP 1043960 A1	18-10-2000
-----			